



Flange 45° SAE J518 (3000 PSI) Série INTERLOCK

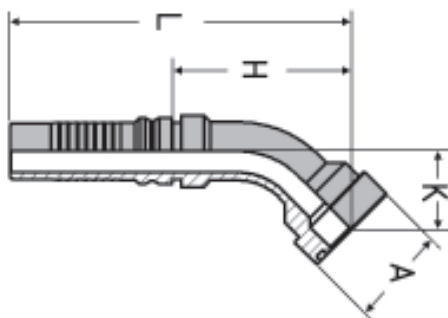

Ø interno do tubo			Flange	H	L	K	A	O-ring	pressão máx. trabalho bar	código para pedidos
traço	DN	pol								
-12	19	3/4"	3/4"	63	113	27	38	24,99x3,53	350	PKF4512-12
-12	19	3/4"	1"	67	119	31	44,5	32,92x3,53	350	PKF4516-12
-16	25	1"	3/4"	78	125	31	38	24,99x3,53	350	PKF4512-16
-16	25	1"	1"	79	131	32	44,5	32,92x3,53	350	PKF4516-16
-16	25	1"	1.1/4"	80	135	33	51	37,69x3,53	250	PKF4520-16
-20	31	1.1/4"	1.1/4"	99	151	39	51	37,69x3,53	250	PKF4520-20
-20	31	1.1/4"	1.1/2"	99	156	39	60,5	47,22x3,53	200	PKF4524-20
-24	38	1.1/2"	1.1/2"	117	163	46	60,5	47,22x3,53	200	PKF4524-24
-24	38	1.1/2"	2"	118	168	47	71,5	56,74x3,53	200	PKF4532-24
-32	51	2"	2"	152	173	58	71,5	56,74x3,53	200	PKF4532-32

Flange 45° SAE J518 (6000 PSI) Série INTERLOCK

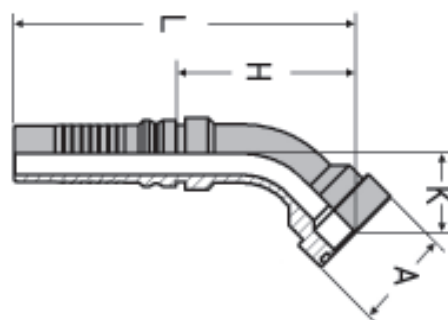

Ø interno do tubo			Flange	H	L	K	A	O-ring	pressão máx. trabalho bar	código para pedidos
traço	DN	pol								
-12	19	3/4"	3/4"	67	129	31	41,3	24,99x3,53	420	PKFR4512-12
-12	19	3/4"	1"	71	132	34	47,6	32,92x3,53	420	PKFR4516-12
-16	25	1"	3/4"	78	151	31	41,3	24,99x3,53	415	PKFR4512-16
-16	25	1"	1"	82	155	35	47,6	32,92x3,53	415	PKFR4516-16
-16	25	1"	1.1/4"	87	160	40	54	37,69x3,53	415	PKFR4520-16
-20	31	1.1/4"	1.1/4"	100	188	40	54	37,69x3,53	415	PKFR4520-20
-20	31	1.1/4"	1.1/2"	105	193	45	63,5	47,22x3,53	415	PKFR4524-20
-24	38	1.1/2"	1.1/2"	117	211	46	63,5	47,22x3,53	345	PKFR4524-24
-32	51	2"	2"	154	252	60	79,4	56,74x3,53	345	PKFR4532-32