



## Flange reto SAE J518 (3000 PSI) Série INTERLOCK

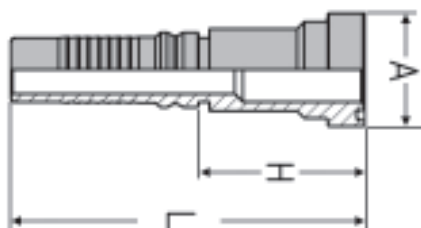

Ø interno do tubo			Flange	H	L	A	O-ring	pressão máx. trabalho bar	código para pedidos
traço	DN	pol							
-12	19	3/4"	3/4"	52	113	38	24,99x3,53	350	PKF0012-12
-12	19	3/4"	1"	58	119	44,5	32,92x3,53	350	PKF0016-12
-16	25	1"	3/4"	53	125	38	24,99x3,53	350	PKF0012-16
-16	25	1"	1"	59	131	44,5	32,92x3,53	350	PKF0016-16
-16	25	1"	1.1/4"	63	135	51	37,69x3,53	250	PKF0020-16
-20	31	1.1/4"	1.1/4"	61	151	51	37,69x3,53	250	PKF0020-20
-20	31	1.1/4"	1.1/2"	69	156	60,5	47,22x3,53	200	PKF0024-20
-24	38	1.1/2"	1.1/2"	69	163	60,5	47,22x3,53	200	PKF0024-24
-24	38	1.1/2"	2"	74	168	71,5	56,74x3,53	200	PKF0032-24
-32	51	2"	2"	76	173	71,5	56,74x3,53	200	PKF0032-32

## Flange reto SAE J518 (6000 PSI) Série INTERLOCK

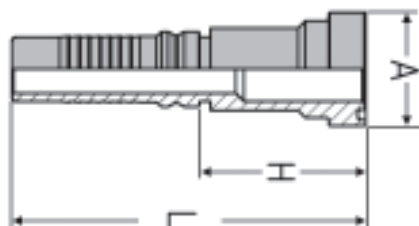

Ø interno do tubo			Flange	H	L	A	O-ring	pressão máx. trabalho bar	código para pedidos
traço	DN	pol							
-12	19	3/4"	3/4"	58	120	41,3	24,99x3,53	420	PKFR0012-12
-12	19	3/4"	1"	60	122	47,6	32,92x3,53	420	PKFR0016-12
-16	25	1"	3/4"	59	132	41,3	24,99x3,53	415	PKFR0012-16
-16	25	1"	1"	64	137	47,6	32,92x3,53	415	PKFR0016-16
-16	25	1"	1.1/4"	68	141	54	37,69x3,53	415	PKFR0020-16
-20	31	1.1/4"	1.1/4"	69	157	54	37,69x3,53	415	PKFR0020-20
-20	31	1.1/4"	1.1/2"	79	166	63,5	47,22x3,53	415	PKFR0024-20
-24	38	1.1/2"	1.1/2"	79	173	63,5	47,22x3,53	345	PKFR0024-24
-32	51	2"	2"	97	195	79,4	56,74x3,53	345	PKFR0032-32